

EDSYN^{INC}®

ZD505-24


ZD505V-24

SOLDAPULLT

HOT TIP

DESOLDERING STATION

- COMPLIES WITH MIL-S-45743E, MIL-STD-2000, DOD-STD-2000-1B, WS6536E AND ESD SPEC, DOD-STD-1686, DOD-HDBK-263

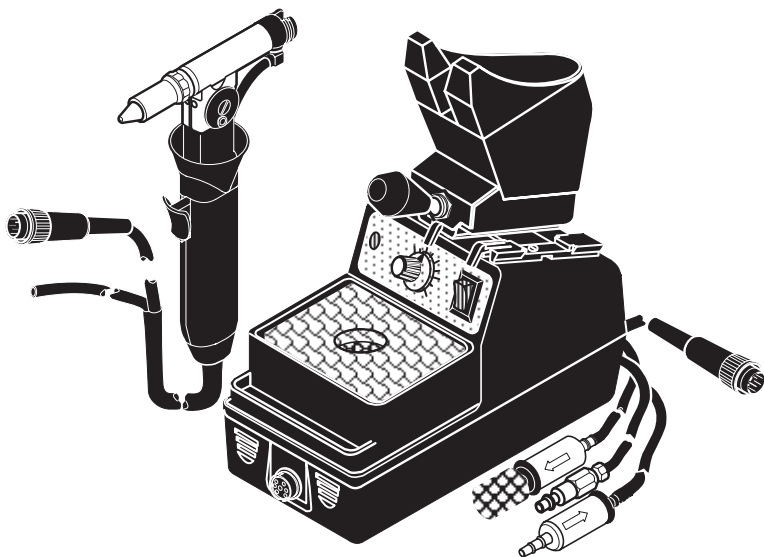

MADE IN THE
U.S.A.

instruction manual




POWER SUPPLY


PS900-24 is used on both ZD505-24 and ZD505V-24.




CAUTION: Connecting a defective Tool may damage the Power Supply.

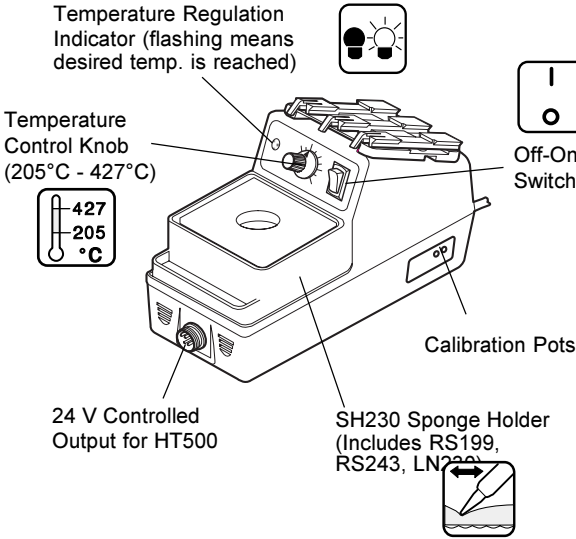

Plug for ZD505-24-1




Plug for ZD505-24-3



SPECIFICATION

- 24V, 50/60 Hz, 70W
- Temperature range: 400°F - 800°F (205°C - 425°C)
- Temperature regulation: $\pm 6^\circ\text{F}$ ($\pm 3^\circ\text{C}$)
- Voltage leakage from tip to ground less than 2 MV
- Tip to ground resistance less than 2 ohm
- Complies with MIL-S-45743E, DOD-STD-2000-1B, MIL-STD-2000, WS6536E and ESD SPEC, DOD-STD-1686, DOD-HDBK-263.




**PD530
Tool Holder**
(for ZD505 series)

CLEANING SPONGE

1. Keep sponge moist by adding clean water.
2. Replace dirty sponge to prevent tip contamination during tip cleaning.

CAUTION:
Over-filling can cause thermal shock to the tip or heating element during tip cleaning.

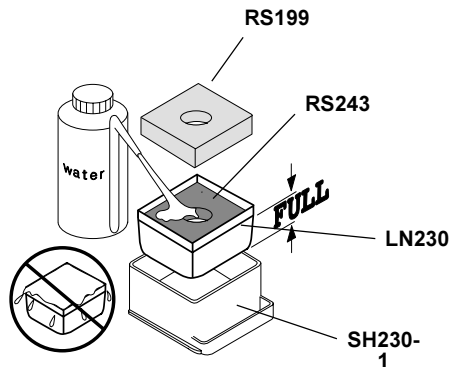

ZD505V-24 instruction manual



© Copyright EDSYN, Inc. 1997

ALL RIGHTS RESERVED.
NO PART OF THIS MANUAL INCLUDING THE INDIVIDUAL ICONS
MAY BE REPRODUCED OR UTILIZED IN ANY FORM OR BY ANY MEANS
WITHOUT THE PERMISSION OF EDSYN, INC.

THE NAMES LONER, SOLDAPULLT, ATMOSCOPE, AUTO-VAC, IDLE-REST,
OCTAVAC AND KLATCH
ARE REGISTERED TRADEMARKS OF EDSYN, INC.



Intellectual
Property

MOST PRODUCTS ARE COVERED BY U.S. AND
FOREIGN PATENTS AND PENDING APPLICATIONS.

DESIGN, COLOR AND MATERIALS
SUBJECT TO CHANGE WITHOUT NOTICE.

TIP STYLE ON SOLDERING, DESOLDERING AND HOT AIR TOOLS MAY VARY.

PRINTED IN U.S.A.



15958 Arminta Street, Van Nuys, CA 91406-1896

Phone (818) 989-2324

FAX (sales) 818-997-0895 FAX (service): 818-997-0460

FORM1682
Rev C